


INSERTS TARAUDES




INSERTS TARAUDES



INSERT CANNELE TETE FRAISEE

Type : **IICTF**

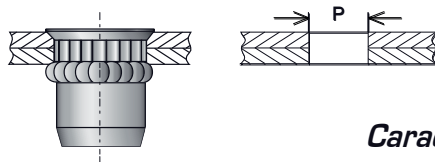

Caractéristiques Techniques

Dimensions en mm					
M	D Ø de la tête	f	Epaisseurs à sertir	P Ø de perçage + 0,1 / - 0	Code
3	7	1	1,3 - 2,0 2,0 - 3,0	5	1320 2030
4	8	1	1,3 - 2,0 2,0 - 3,0 3,0 - 4,0	6	1320 2030 3040
5	9	1	1,5 - 2,0 2,0 - 3,0 3,0 - 4,0	7	1520 2030 3040
6	11	1	1,8 - 3,0 3,0 - 4,0 4,0 - 5,0 5,0 - 6,0	9	1830 3040 4050 5060
8	14	4	1,5 - 3,0 3,0 - 4,0 4,0 - 5,0 5,0 - 6,0	11	1530 3040 4050 5060
10	16	4	1,5 - 3,0 3,0 - 4,5 4,5 - 6,0	13	1530 3045 4560

► **Matière** : inox

Existe en version borgne.

Pour toutes autres dimensions
ou matières,
nous consulter.



**SOUDEGE INSTANTANE ET
FIXATIONS INDUSTRIELLES**

22, rue des Celtes - 68510 SIERENTZ

Tél. 03 89 81 59 51



Fax : 03 89 81 55 07



Courriel : messages@sifi.fr

www.sifi.fr

Sous réserve d'erreurs, d'omissions, de modifications et de transformations.